
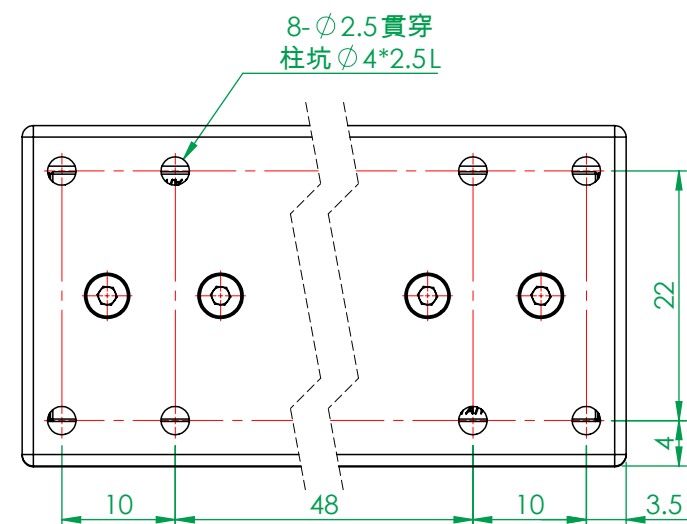
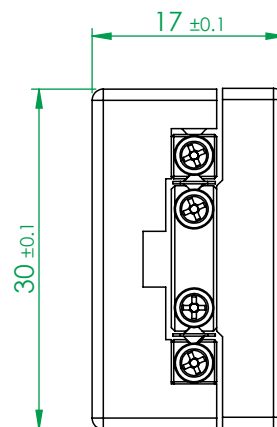
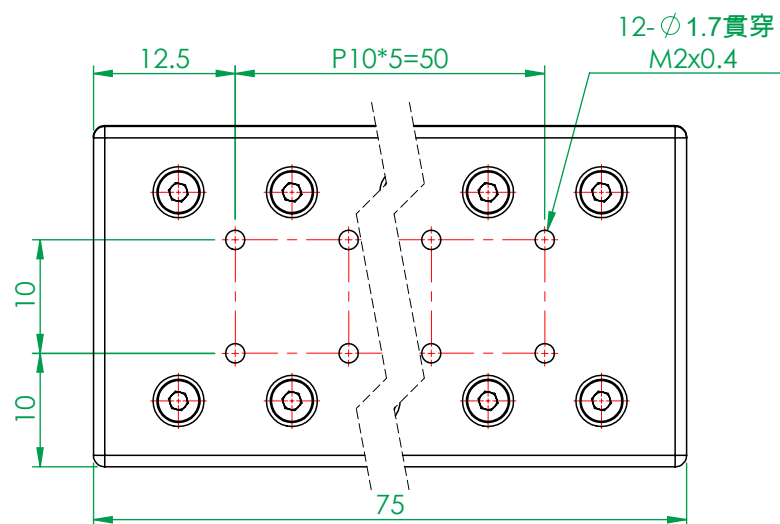


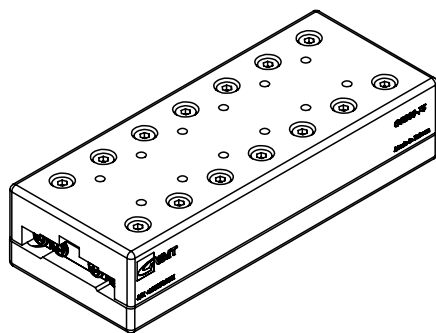

| 成品檢驗精度  |         |
|---------|---------|
| 滑台中央平行度 | 滑台側面平行度 |
| 0.002mm | 0.005mm |

|             |       |                                                                                                                                                                                                                                                 |     |     |           |
|-------------|-------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----|-----|-----------|
| 一 般 公 差     |       | 精加工:<br>                                                                                                                                                    | 審 核 | 日 期 |           |
| 尺寸範圍        | 容 許 差 | 細加工:<br>                                                                                                                                                    | 繪 圖 | 日 期 |           |
| 0.5 ~ 4     | +0.05 | 粗加工:<br>                                                                                                                                                    | 設 計 | 日 期 | 2007/7/21 |
| 4 ~ 16      | +0.07 |  <a href="http://www.gmtglobalinc.com">Http://www.gmtglobalinc.com</a> 熱情／創新／快樂<br>GMT 高明鐵企業股份有限公司<br>GMT GLOBAL INC.<br>TEL:886-4-7688329 FAX:886-4-7688315 |     |     |           |
| 16 ~ 68     | +0.1  |                                                                                                                                                                                                                                                 |     |     |           |
| 68 ~ 250    | +0.2  |                                                                                                                                                                                                                                                 |     |     |           |
| 250 ~ 1000  | +0.3  |                                                                                                                                                                                                                                                 |     |     |           |
| 1000 ~ 1500 | +0.5  |                                                                                                                                                                                                                                                 |     |     |           |

(FM0758A)